FLIGHT SUMMARY REPORT

Flight #:

90-108

Date:

16 July 1990

Sensor Package: Wild-Heerbrug RC-10
Multispectral Atmospheric Mapping

Sensor (MAMS)

Area(s) Covered: Pennsylvania

Investigator(s): Jedlovec, NASA-MSFC

Aircraft #:

709

Flight Request: 90T247

Julian Date: 197

SENSOR DATA

Accession #:

04055

Sensor ID #:

076

080

Sensor Type:

RC-10

MAMS

Focal Length:

12"

Film Type:

High Definition Aerochrome IR

304.89 mm

SO-131

Filtration:

cc.10B

Spectral Band:

510-900 nm

f Stop:

Shutter Speed:

1/250

of Frames:

205

% Overlap:

60

Quality:

Excellent

Good

Remarks:

Airborne Science and Applications Program

The Airborne Science and Applications Program (ASAP) is supported by three ER-2 high altitude Earth Resources Survey aircraft. These aircraft are operated by the High Altitude Missions Branch at NASA-Ames Research Center, Moffett Field, California. The ER-2s are used as readily deployable high altitude sensor platforms to collect remote sensing and in situ data on earth resources, celestial phenomena, atmospheric dynamics, and oceanic processes. Additionally, these aircraft are used for electronic sensor research and development and satellite investigative support.

The ER-2s are flown from various deployment sites in support of scientific research sponsored by NASA and other federal, state, university, and industry investigators. Data are collected from deployment sites in Kansas, Texas, Virginia, Florida, and Alaska. Cooperative international scientific projects have deployed the aircraft to sites in Great Britain, Australia, Chile, and Norway.

Photographic and digital imaging sensors are flown aboard the ER-2s in support of research objectives defined by the sponsoring investigators. High resolution mapping cameras and digital multispectral imaging sensors are utilized in a variety of configurations in the ER-2s' four pressurized experiment compartments. The following provides a description of the digital multispectral sensor used for data collection during this flight.

Multispectral Atmospheric Mapping Sensor

The Multispectral Atmospheric Mapping Sensor (MAMS) is a modified Daedalus Scanner flown aboard the ER-2 aircraft. It is designed to study weather related phenomena including storm system structure, cloud-top temperatures, and upper atmosphere water vapor. The scanner retains the eight silicon-detector channels in the visible/near-infrared region found on the Daedalus Thematic Mapper Simulator, with the addition of four channels in the thermal infrared relating to specific water vapor features. The specific bands are as follows:

Daedalus Channel	Wavelength, um
1	LSBs for Channels 9-12
2	0.45 - 0.52
3	0.52 - 0.60
4	0.57 - 0.67
5	0.60 - 0.73
6	0.65 - 0.83
7	0.72 - 0.99
8	0.83 - 1.05
9	3.55 - 3.93 low range
10	3.55 - 3.93 high range
11	10.3 - 12.1
12	12.5 - 12.8

Sensor specifications are as follows:

IFOV: 5.0 mrad
Pixel/Scan Line: 716

Total Scan Angle: 86°
Scan Rate: 6.25 scans/second
Digitization: 8-bit Channels 2-8

8-bit Channels 2-8 10-bit Channels 9-12 The data will not be archived at EROS Data Center because this is an experimental system with low spatial resolution and unique spectral characteristics. As all scenes will be primarily cloud-covered there would be little terrestrial application for the data. Further information concerning the data can be obtained from principal investigator, Gregory S. Wilson, Atmospheric Effects Branch, George C. Marshall Space Flight Center, National Aeronautics and Space Administration, Marshall Space Flight Center, Alabama 35812-5001.

NOTE: Information on data tape format, logical record format, and scanner calibration data may be obtained from the NASA-Ames Aircraft Data Facility at (415) 604-6252 or FTS 464-6252.


CAMERA FLIGHT LINE DATA FLIGHT NO. 90-108

Accession # 04055

Sensor #

920

Check	Frame	Time (GMT-	Time (GMT-hr, min, sec)	Altitude, MSL	
				s la	Cloud Cover/Remarks
A - B	4001-4019	15:01:40	15:09:56	65000/19800	30-100% cirro cumulus; emulsion abrasion (frame 4018)
C - D	4020-4044	15:18:42	15:29:44	ı	20-80% cirro cumulus
F.F	4045-4069	15:34:31	15:45:29	:	50-100% cirro cumulus; emulsion abrasion (frame 4056)
A - B	4070-4091	15:57:14	16:06:42	ı	30-90% cirro cumulus; emulsion abrasions (frames 4078-4079)
C - D	4092-4115	16:14:18	16:24:40		60-90% cirro cumulus
E - F	4116-4139	16:29:33	16:39:55	=	60-100% cirro cumulus
A - B	4140-4162	16:51:28	17:01:19		50-100% cirro cumulus; emulsion abrasions (frames 4145, 4147)
C - D	4163-4186	17:09:11	17:19:29	=	20-60% cirro cumulus
E - F	4187-4205	17:24:20	17:32:19	=	50-100% cirro cumulus
E - F	4187-4205	17:24:20	17:32:19	ž	

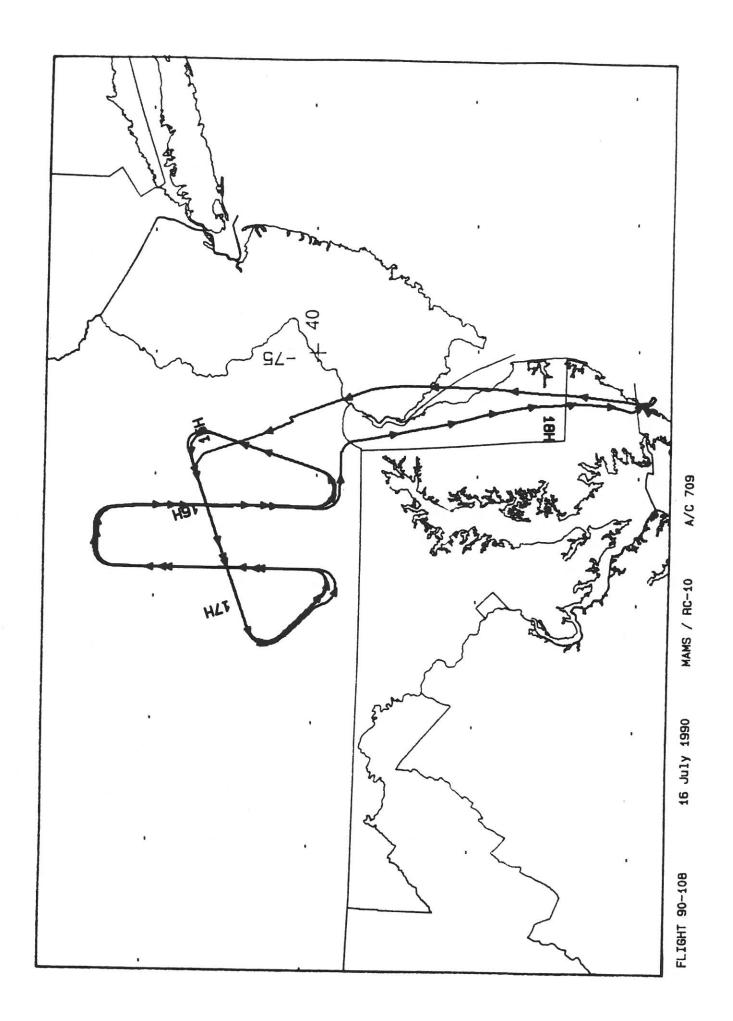

ONC F-18&19

Accession # 04055

NAMS / RC-10

A/C 709

16 July 1990

FLIGHT 90-108